


AI _ Internet of Things

AI IoT SMART PIONEER LIGHT



From the basic theory of **AI**, you can learn algorithms using TensorFlow that are used for machine learning and deep learning. And it provides the service to control the actuator and the response to information request based on speech recognition using API provided by **Google**.

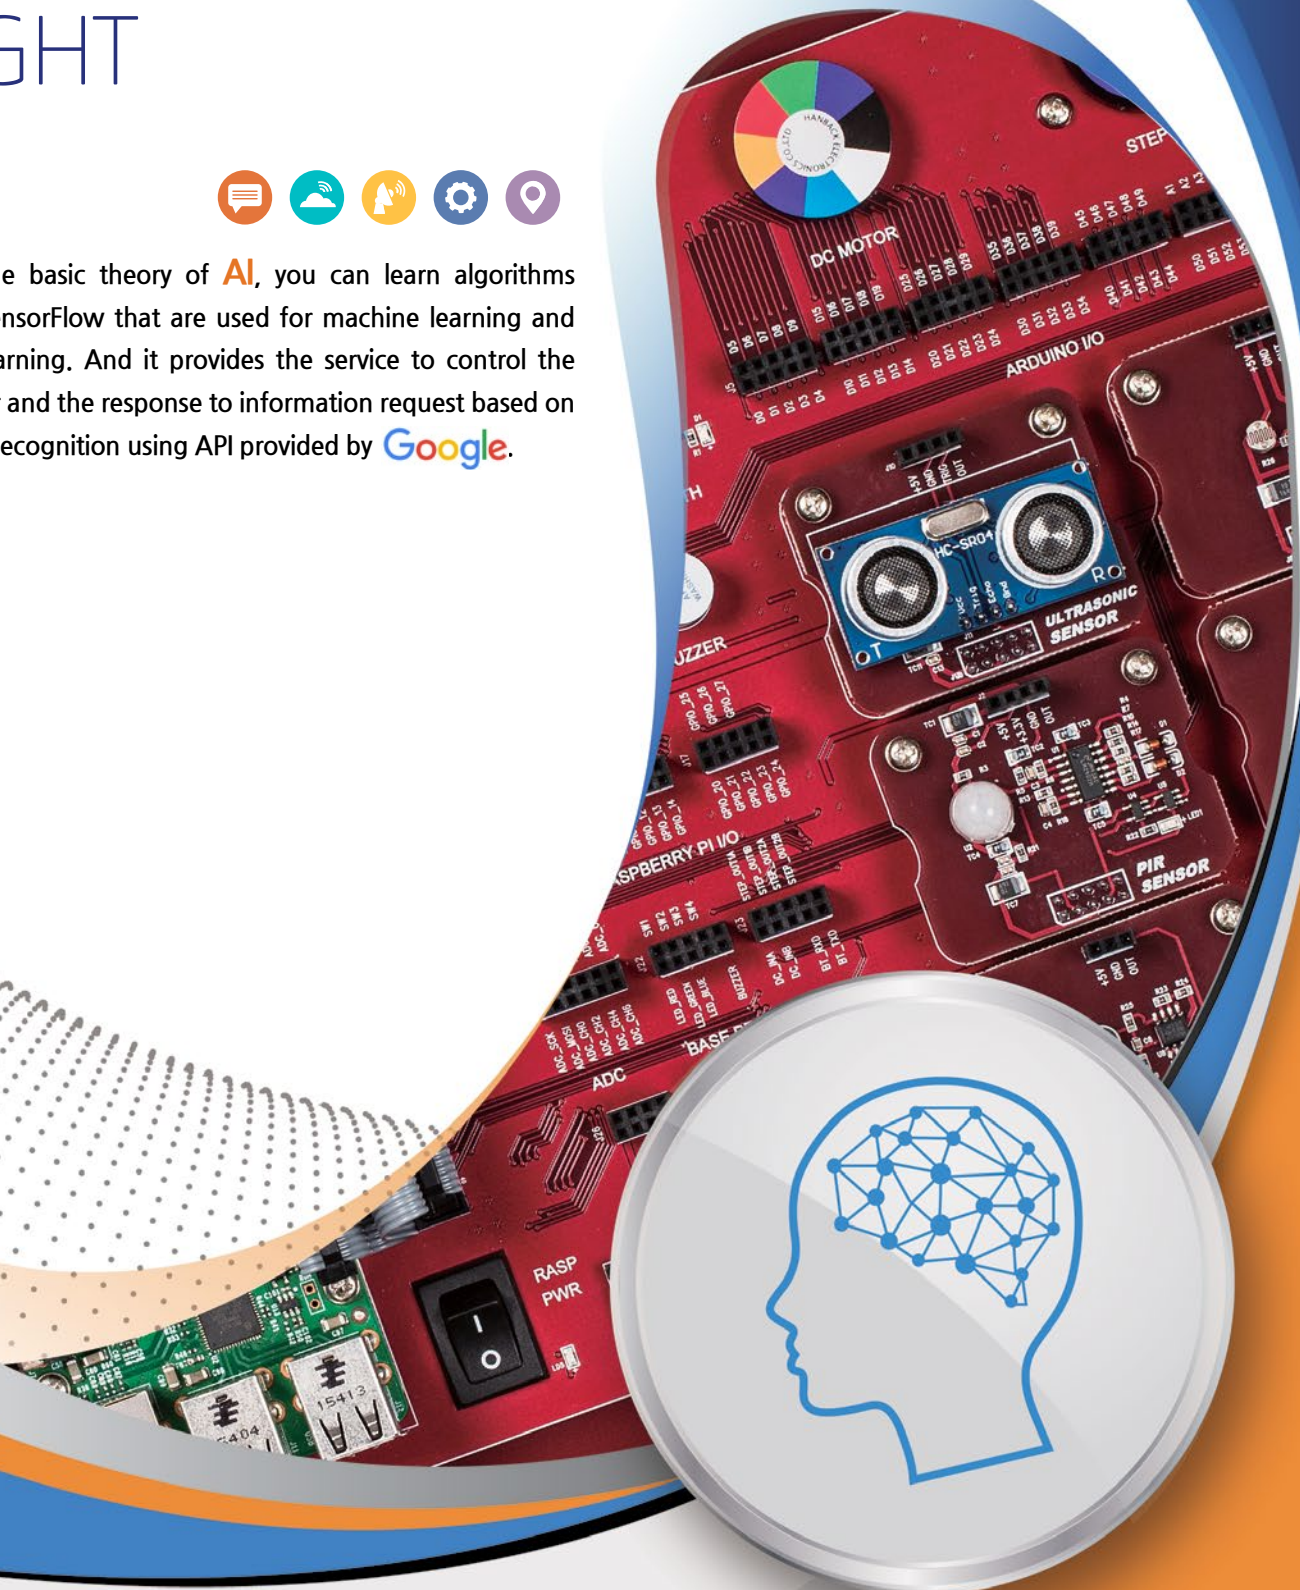

HANBACK ELECTRONICS

518 Yuseong-daero, Yuseong-Gu, Daejeon 34202, South Korea

TEL. +82-42-610-1111, 1164 (Dir.) FAX. +82-42-610-1199 E mail. overseas@hanback.co.kr

Product specifications and appearance of this catalog are subject to change without notice.

V2.2.1

Since 1984



Software Specifications


Module	Category	Specifications
AI	TensorFlow	TensorFlow 1.0.1
Module	Google Assistant	Google Assistant 0.1.1
Gateway	Item	Specification
	OS	Raspbian Linux 3.xx
	Camera Program	Pi Camera Driver, Camera Streaming Server
	Audio	Alsa Driver
	Server Program	Sensor Control S/W
ADK-2560	F/W IDE	Arduino 1.6.x
	Communication	Bluetooth Communication S/W
	Function	Sensor Control S/W
Cloud	Minutes Cloud Platform	- Powered by Amazon Web Service(AWS) Cloud infrastructure - Flexible cloud Architecture scalable to the number of IoT Devices and users - Provides virtual sensors /actuators from a variety of external data sources - Web user interface : Provides easy administrator screen through web interface - Device management : Gateway registration - Sensor management : Provides the ability to manage(register/modify/delete) and test the sensor
IDE	AndroX Studio	- Launcher : 2.0 - ARM Cross Toolchain : GCC 4.6.3 for Windows (Newly build the source code) - Host Toolchain : GCC 4.5.3 (Built-in cygwin) - Cygwin : 1.7.17 - Make : GNU Make 3.82.90 - Eclipse Platform : Kepler(4.3) - Arduino Platform : 1.0.5 - Java SDK : Java SE Runtime Environment (build 1.6.0_26-b03) - Android NDK : Release R8E - Android SDK : Android 4.2(API 17) - ADT : 22.0.1 - Android SDK Tools : 22.0.1 - Remote Explorer : 5.1.1 - Remote Shell : 0.62 - Remote Viewer : 2.7.1 - Serial Packet Monitor : 1.2 - Application Package : 1.2 - Installer : 1.4

Architecture with Mobile





Voice
Commands

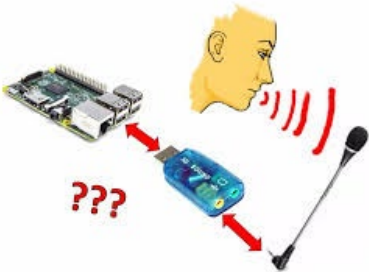

Raspberry Pi

Google Voice API
(speech to text)



Compare voice command
with command
configuration file



Perform defined
Actions



Google Speech API
(Text to speech)



Internet



Hardware Specifications

Module	Category	Specifications
Gateway (Raspberry Pi 4)	Processor	Broadcom BCM2711 1.5Ghz Cortex-A72 quad-core
	RAM	2GB
	Storage	MicroSD
	USB	USB 2.0 2ports, USB 3.0 2ports
	Power	USB-C socket 5V, 2A
	Audio	3.5mm A/V JACK
	Digital Video	HDMI 2 * micro HDMI
	Ethernet	10/100 BaseT
	Wireless Network	802.11n , Bluetooth 5.0
	Expansion I/O	40EA GPIO (2x20 2.54mm pitch Header)
	Size	116x56mm
HBE-ADK-2560	Micro Controller	ATmega2560 16MHz
	Flash Memory	256kByte(8KB USED BY BOOTLOADER)
	Clock Speed	16MHz
	USB Controller	ATmega8U2 16MHz
	USB Host Controller	MAX3421E USB 2.0
	GPIO Socket	2x18 Socket(1EA), 1x10 Socket(1EA), 1x8 Socket(5EA)
	Operating Voltage	7~12V
	Dimension	122 x 76(mm)
Sensor Module	PIR	Sensor : RE200B Sensing Range : 110 degree Operating Voltage : 3.3V I/O Interface : 1pin Digital Output




Module	Category	Specifications
Sensor Module	Sound Sensor	Sensor : Microphone Feature : Ambient sound detection, sound level detection Operatiing Voltage : 5V I/O Interface : 1pin Analog Output
	Humidity / Temperature Sensor	Sensor : DHT11 Feature : Temperature and humidity sensor, ambient temperature and humidity detection Operation Voltage : 5V I/O Interface : 1pin Digital Output
	Ultrasonic Sensor	Sensor : HC-SR04 Feature : 2~500cm distance measuring range, 40kHz Frequency Operating Voltage : 5V I/O Interface : 1pin Digital Input, 1pin Digital Output
	Light Sensor	Sensor : CdS Operation Voltage : 5V I/O Interface : 1pin Analog Output
	Variable Resistor Module	Sensor : 1kΩ Variable Resistor Feature : 0 ~ 5V DC Variable Voltage out I/O Interface : 1pin Analog Output
BASE	Raspberry Pi 4 block	Raspberry Pi 4 Connector, Power Switch, I/O Port
	ADK2560 Block	ADK2560 Connector, I/O Port
	Sensor Module Block	Sensor Module 6 Connector, I/O Port
	Step Motor Block	Feature : Step Motor, 32 Step, 1/16 Gear Motor Motor Driver : ULN2003 Operation Voltage : 5V I/O Interface : 4pin Digital Input
	LED Block	Feature : RED, GREEN, BLUE COLOR LED Current Consumption : 20mA Luminous Intensity : 6000~7000mcd at 20mA Viewing Angle : 30 degree I/O Interface : 3pin Digital Input
	Switch Block	Feature : Button 4EA I/O Interface : 4pin Digital Output
Jumper Cable	-	-

APPS

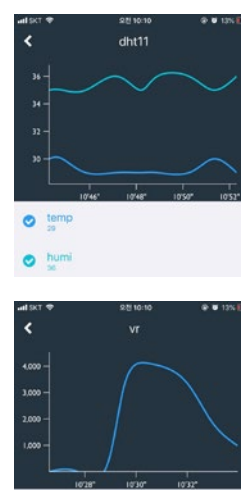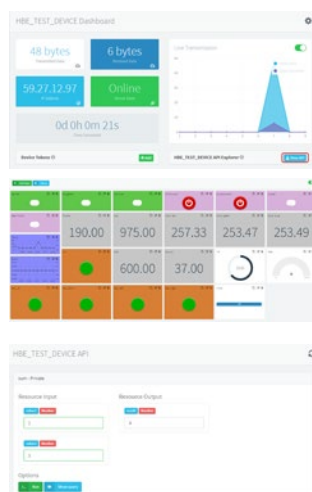

Layout

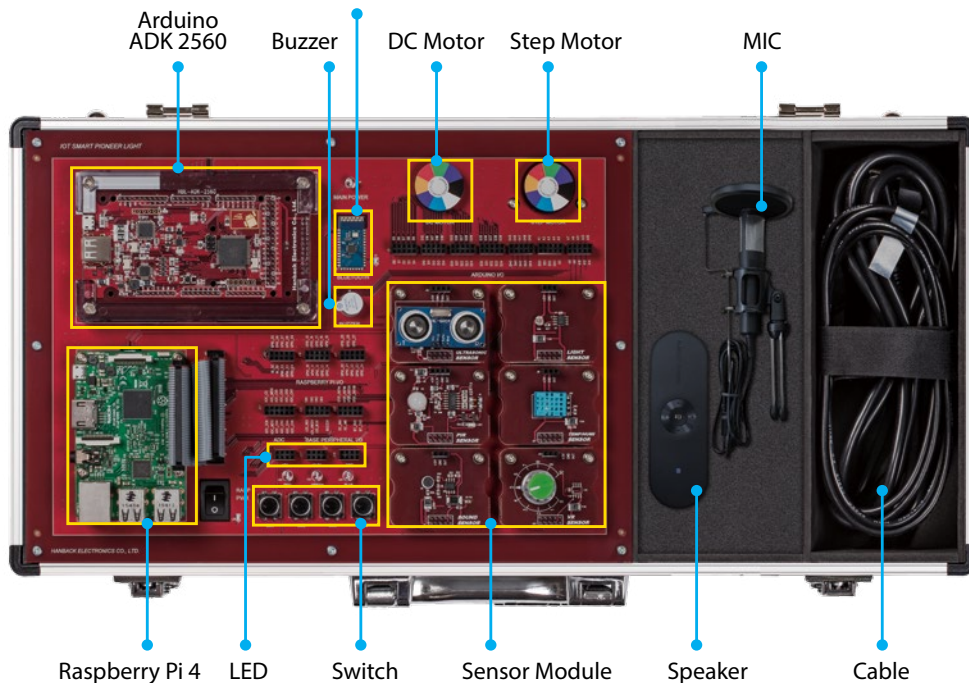

Textbook Chapter for AI

1. Machine Learning

- What is machine learning?
- Types of machine learning
- Machine learning algorithm

2. Practice Equipment Introduction

3. Raspberry Pi

- Introduction and development environment setting

4. TensorFlow

- Introduction to TensorFlow
- Development environment to use TensorFlow
- Using TensorFlow function
- Implement algorithm using TensorFlow

5. Google Assistant

- Introduction to G.A
- G.A development environment setup and account setup
- First conversation with G.A
- Device control using speech recognition

Textbook Chapter for IoT

1. Overview of IoT (Internet of Things)

2. Equipment Configuration and Practice Environment Configuration

3. Practice of Smart Sensor Control using Arduino

4. Raspberry Pi

5. Practice Smart Sensor Control using Raspberry Pi

6. Smart Sensor and Cloud Integration